
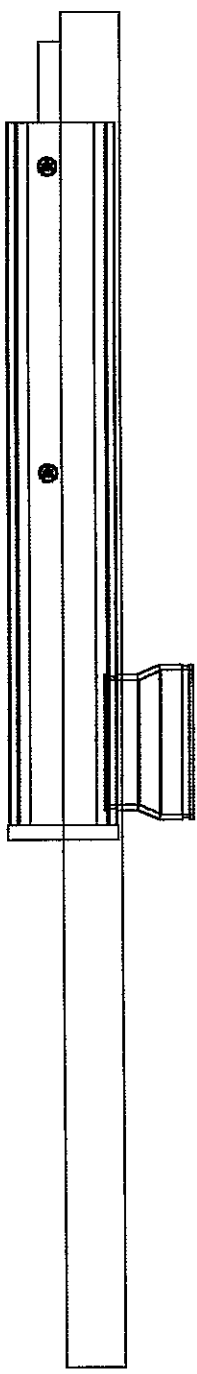


Holes dug for post should be filled with concrete.

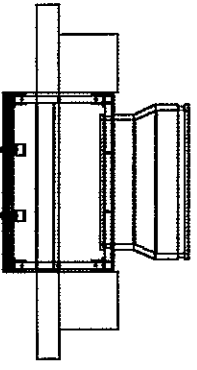

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE IN INCHES.

X ±.06
XX ±.03
XXX ±.010

ANGLES ±2°

BREAK ALL SHARP CORNERS.

ALL INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO AGRIL DRAIN CORP. DUPLICATION OR TRANSMITTAL OF THIS DOCUMENT IS STRICTLY PROHIBITED WITHOUT THE WRITTEN CONSENT OF AGRIL DRAIN CORP.

| ITEM | QTY | ITEM DESCRIPTION | PART NO. |
|---|------------------|------------------|----------|
| Agri Drain CORPORATION <i>America's Most Complete Supplier of Water Management Products</i> P.O. Box 458 - 1482 340th St. - Ader, IA 50002 - Ph: 1-800-232-4742 - Fax 1-800-232-3353 - www.agridrain.com | | | |
| INLET STRUCTURE BRACING | | | |
| DATE: 08DEC06 | DRAWN BY: T.HUSS | PART NO. | REV. |